



# SMOKED OAK™

## Specifications

### General

#### DESCRIPTION

- Complete installation of interlocking flooring modular tile.

#### QUALITY ASSURANCE

- Manufacturer of synthetic flooring shall be an organization specializing in the manufacturing of the products specified in this section.
- Manufacturer shall be ISO 9001:2015 Certified to assure proper quality control.
- Products specified in this section shall be installed and/or supervised by an authorized factory trained representative.
- Installer shall be liable for all matters related to the installation of the products described herein for a period of not less than one (1) year from the date of installation.

#### SUBMITTALS


- Specification sheets for products proposed for submission.
- Submit a sample of specified flooring system showing color and edging system.
- Maintenance program and specifications shall be submitted upon request.

#### DELIVERY AND STORAGE

- General contractor shall provide a clean and dry area where the materials can be stored until time of installation.
- Material shall not be delivered on site until all related work is completed and proper storage facilities can be secured.

#### WORKING CONDITIONS

- Synthetic materials shall not be installed until all other trades are completely finished in the synthetic flooring areas.

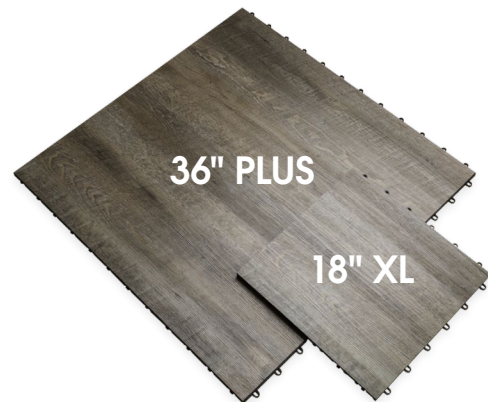

**Dimensions:** XL: 18" x 18" x 0.625" (457.2 mm x 457.2 mm x 16 mm)  
Plus: 36" x 36" x 0.625" (914.4 mm x 914.4 mm x 16 mm)

**Weight:** XL: 64 oz. (1816 g)  
Plus: 256 oz. (7264 g)

#### WARRANTY

- SnapLock® warrants that the materials supplied shall be free from manufacturing defects as outlined in the limited warranty.
- This warranty is expressly limited to the synthetic flooring materials supplied by SnapLock. This warranty does not cover damage caused by fire, winds, floods, moisture, chemicals (*other than those used for maintenance specified by manufacturer*) nor does it apply to damage caused by ordinary wear, misuse, abuse, neglect, faulty building construction faulty subsurface or site preparation, or unprofessional installation.

## Products

### MATERIALS

- SnapLock Smoked Oak modular flooring
  - XL: Solid top design shall be 18" x 18" x 0.625" (457.2 mm x 457.2 mm x 16 mm), high impact PP (polypropylene) floor tile with commercial vinyl overlay. Weight: 64 oz. (1816 g)
  - Plus: Solid top design shall be 36" x 36" x 0.625" (457.2 mm x 457.2 mm x 16 mm), high impact PP (polypropylene) floor tile with commercial vinyl overlay. Weight: 256 oz. (7264 g)

### PRODUCT TEST RESULTS

- Friction (ASTM C 1028): Dry – 0.77, Wet – 0.61
- Compression vs. Crush (ASTM D 3998): No Break
- Flame Spread Index (ASTM E 84): 70
- Smoke Generation (ASTM E 662): 325
- Noise Reduction Coefficient (ASTM C 423): 5 - 10%
- Rolling Load (DIN 18032-02): Pass
- Standard Deformation (DIN 18032-02): 0.9mm
- Load Bearing Capacity (DIN 18032-02): >250 psi
- R-Value:  $x < 1.0$
- Flatness: 0.0mm
- Lateral Movement: 0.00" – 0.045"

### SANITARY INFORMATION

- Fungus Resistance (ASTM G 21): No Growth
- Resistant to the following:
  - Bacteria and Mildew
  - Staphylococcus
  - Klebsiella Pnuemoniae
  - Pink Staining Organism
  - STV Reticulum

## Execution

### INSPECTION

- Inspect subsurface for proper tolerances, dryness and level. Any discrepancies must be reported in writing to the general contractor.
- Subsurface to be broom cleaned prior to installation of synthetic flooring.
- Installer shall document all working conditions prior to commencement of the installation.



1-800-457-0174 | [www.racedeck.com](http://www.racedeck.com)  
2330 California Ave. Salt Lake City, UT 84104